

WB-SU

SATELLITE UNIVERSAL MOUNT



INSTALLATION INSTRUCTIONS

Space WB-SU Satellite Universal Mount has been designed for multiple installation applications.


Its unique black powder coated finish blends in nicely with its surrounds.

Used with the telescopic stay bars (included) offers a sturdy mount for different types of Satellite Dishes and Antennas.


All accessories are included in the kit to allow for easy assembly.

Package Contents and Accessories:


1. WB-SU Satellite Universal Mount
2. Adjustable Stays x 2
3. M8 x 37mm L Shaped Screw x 2
4. 5/16" x 16mm Carriage Bolt x 2
5. 5/16" Flange Nut x 2
6. 1/4" x 13mm Carriage Bolt x 2
7. 1/4" Flange Nut x 2
8. 1/4" x 60mm Hexagon Full Thread Bolt x 3
9. 1/4" Flange Nut x 2
10. 1/4" Self Locking Nut x 1
11. 50mm Hexagon Self Tapping Screw x 4
12. 16mm Hexagon Self Drilling Screw x 4

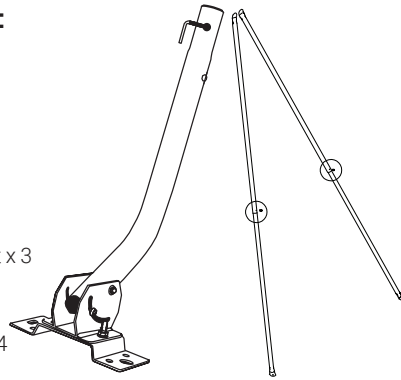


Mounting Options:

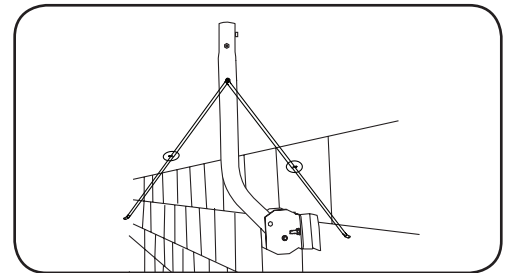


Wall Mounted

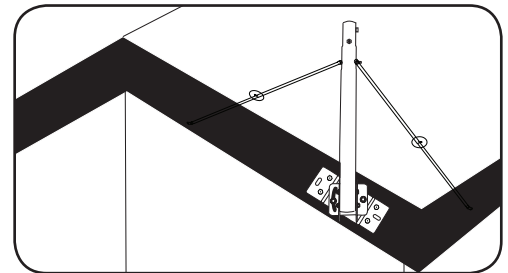

Angled Eave Mount

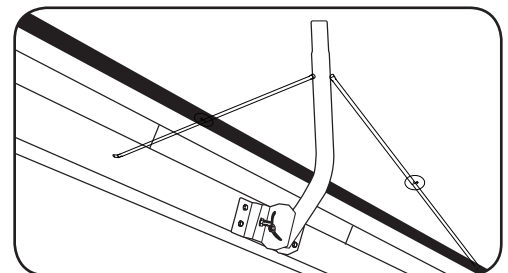

Slanted Facia Mount

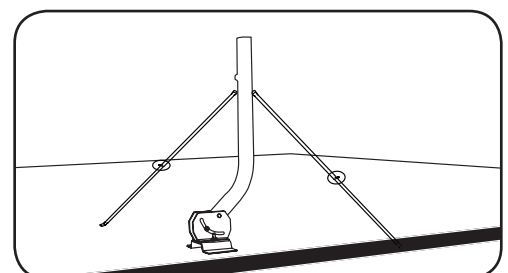

Roof Mount

Mount Assembly:

1. Attach the mounting bracket (Fig. 1) to the mounting brace using the two (30 mm) carriage bolts with flange nuts provided.
2. Attach the J-pole (Fig. 2) to the mounting brace using one (60 mm) hex bolt with flange nut provided.
3. Attach the J-pole (Fig. 3) to the mounting brace for elevation adjustment using two (20 mm) carriage bolts with flange nut provided.
4. Attach the J-pole extension (Fig. 4) to the J-Pole using one (60 mm) hex bolt with flange nut provided.
5. Attach the assembled mount (Fig. 5) to a surface using four lag screws (Not provided).

